



ITSX95

*38.1cm(15.0 inch)SXGA +(1400 × 1050)
Color TFT LCD Module*



Highlight:

Features

- SXGA+1400 × 1050 pixels(1.47M pixels)
- 150cd/m² Typ. Brightness
- Native 262K colors(RGB 6-bit data driver)
- 317.3mm × 242.0mm × 6.1mm Typ./6.3 Max.
- Using the Post Spacer
- 4:3 Aspect Ratio
- 1.87 times as many pixels as XGA(1024 × 768)

Applications

- Notebook PCs
- KIOSK Application
- Measuring Instrument


ITSX95 is a 38.1cm(15.0 inch) color TFT LCD module, and designed for a notebook style personal computer. The screen format and electrical interface are intended to support SXGA+(1400 × 1050) screen. Support color is native 262K colors(RGB 6-bit data driver) All input signals are LVDS(Low Voltage Differential Signaling) interface compatible. Displaying beautiful pictures using the Post Spacer*.

*Post Spacer : Post Spacer is a new technology which keeps a gap between Color filter and TFT array using organic column instead of conventional spacer balls.


For more information about this product, please contact:
IBM Japan, Ltd.
LCD Marketing
Technology Market Development
1623-14, Shimotsuruma, Yamato-shi,
Kanagawa-ken 242-8502, Japan
Tel : 81-46-215-6551
Fax: 81-46-273-6975

Specifications

Screen Diagonal(mm)	381(15.0 inch)
Active Area(mm)	304.5(H)× 228.375(V)
Pixel H× V(pixels)	1400(× 3)× 1050
Pixel Pitch(mm)	0.2175(per one triad)× 0.2175
Pixel Arrangement	R.G.B. Vertical Stripe
Display Mode	Normally White
White Luminance(cd/m ²)	Center ~ 5 point average
Design Point 1 :(ICFL=3.5mA)	90 Typ. ~ 85 Typ.
Design Point 2 :(ICFL=6.5mA)	150 Typ. ~ 140 Typ.
Contrast Ratio	200 : 1 Typ.
Optical Rise Time/Fall Time(msec)	30 Typ. , 50 Max.
Nominal Input Voltage(volt) VDD)	+3.3(+3.0 to +3.6)
Power Consumption(watt) VDD line)	2.1 Typ.(TBD) , 2.6 Max.(TBD)
Lamp Power Consumption(watt)	(w/o inverter loss)
Design Point 1 :(ICFL=3.5mA)	2.6 Typ.(TBD)
Design Point 2 :(ICFL=6.5mA)	4.2 Typ.(TBD)
Weight(grams)	605 Typ.
Physical Size : W × H × D(mm)	317.3 × 242.0 × 6.1 Typ. / 6.3 Max.
Electrical Interface	8 pairs LVDS(Even/Odd R/G/B Data(6bit) , 3sync signals, Clock)
Support Color	Native 262K colors(RGB 6-bit data driver)
Temperature Range()	
Operating	0 to +50
Storage(Shipping)	-20 to +60

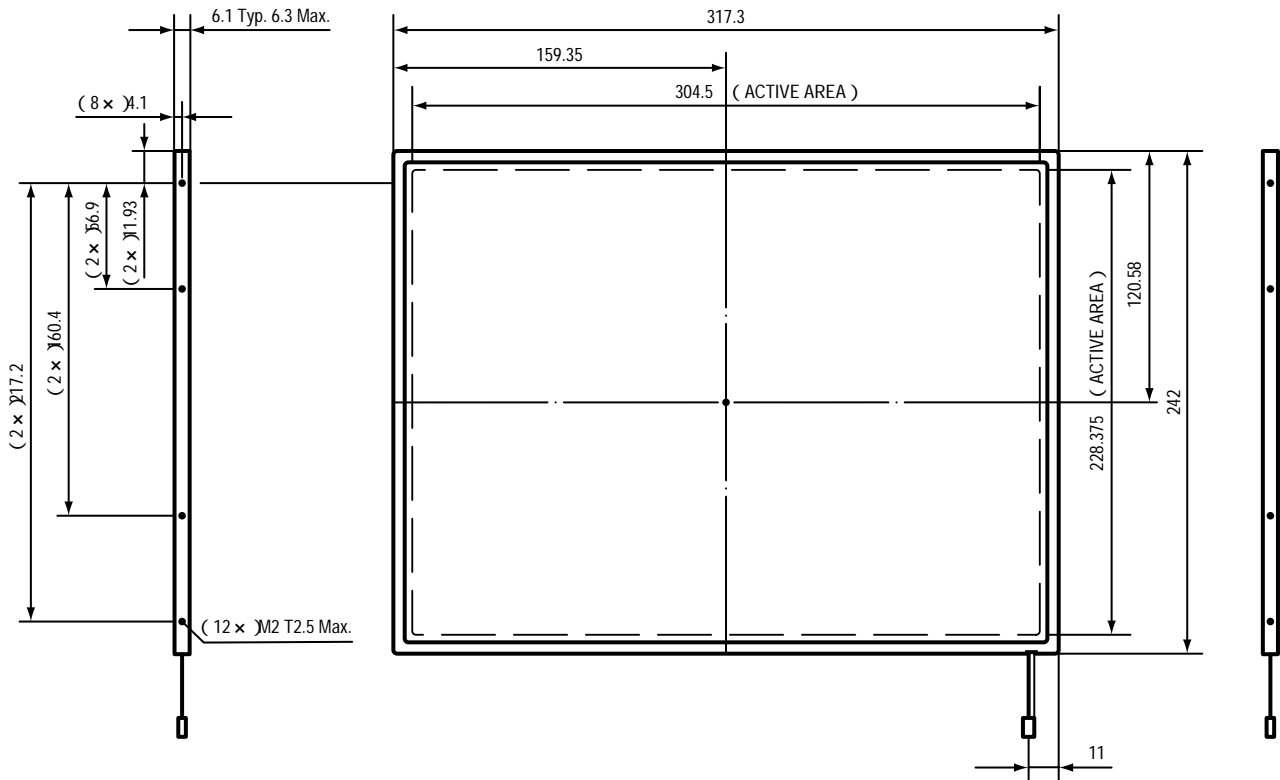

IBM is the trademark of International Business Machines Corporation in the United States and / or other countries.



IBM Japan, Ltd.

2-12, Roppongi 3-chome, Minato-ku, Tokyo 106-8711, Japan
 10-00 Printed in Japan
 © Copyright IBM Corporation 2000

Picture in this catalog may differ from actual products.
 Specifications of products are subject to change without notice.
 Display and printout data are not actual data.